



伸縮継手

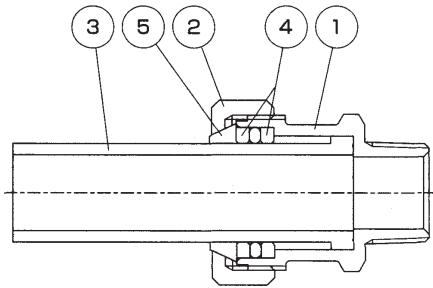


●部品表

| 部品番号 | 部品名称 | 材質 |
|------|----------|--------|
| 1 | 胴 | CAC902 |
| 2 | キャップ | OAC406 |
| 3 | ユニオンソケット | HIVP |
| 4 | 止め輪 | POM |
| 5 | ブレーキリング | POM |

オス

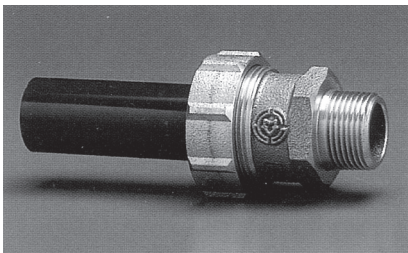


認証登録番号●特G-585




単位：mm

| 呼び径 | 価格 | D | φd | L | L1 |
|-----|--------|--------|----|-------|----|
| 13 | 1,720 | R 1/2 | 18 | 113 | 15 |
| 20 | 2,290 | R 3/4 | 26 | 125 | 15 |
| 25 | 3,280 | R1 | 32 | 137.5 | 15 |
| 30 | 5,540 | R1 1/4 | 38 | 156 | 20 |
| 40 | 7,400 | R1 1/2 | 48 | 166 | 20 |
| 50 | 11,460 | R2 | 60 | 181 | 20 |

メス

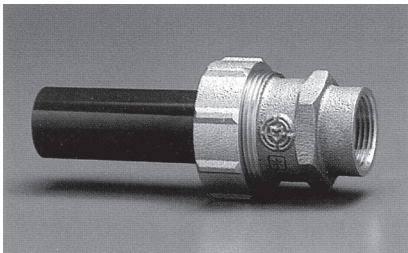


認証登録番号●特G-585




単位：mm

| 呼び径 | 価格 | D | φd | L | L1 |
|-----|--------|---------|----|-------|----|
| 13 | 1,720 | Rc 1/2 | 18 | 110 | 15 |
| 20 | 2,290 | Rc 3/4 | 26 | 120.5 | 15 |
| 25 | 3,280 | Rc1 | 32 | 134.5 | 15 |
| 30 | 5,540 | Rc1 1/4 | 38 | 152 | 20 |
| 40 | 7,400 | Rc1 1/2 | 48 | 162 | 20 |
| 50 | 11,460 | Rc2 | 60 | 176 | 20 |

メータ用

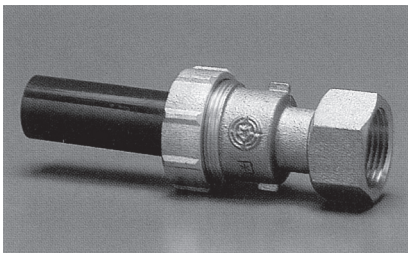


認証登録番号●特G-585




単位：mm

| 呼び径 | 価格 | D | φd | L | L1 |
|-----|--------|--------|----|-------|----|
| 13 | 2,270 | G 3/4 | 18 | 119 | 15 |
| 20 | 3,170 | G1 | 26 | 132 | 15 |
| 25 | 4,320 | G1 1/4 | 32 | 144.5 | 15 |
| 30 | 7,630 | G1 1/2 | 38 | 172 | 20 |
| 40 | 10,450 | G2 | 48 | 182 | 20 |
| 50 | 15,520 | G2 1/2 | 60 | 200 | 20 |

分・止水栓用

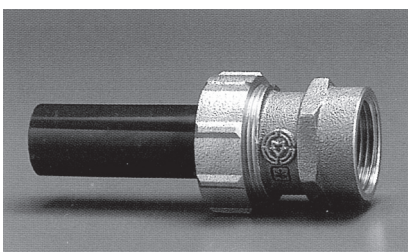

認証登録番号●特G-585



単位：mm

| 呼び径 | 価格 | D | φd | L | L1 |
|-----|--------|--------|----|-------|----|
| 13 | 1,740 | G 3/4 | 18 | 109 | 15 |
| 20 | 2,540 | G1 | 26 | 121 | 15 |
| 25 | 3,480 | G1 1/4 | 32 | 133.5 | 15 |
| 30 | 5,920 | G1 1/2 | 38 | 151 | 20 |
| 40 | 8,070 | G2 | 48 | 164 | 20 |
| 50 | 11,620 | G2 1/2 | 60 | 177 | 20 |