


水道用ポリエチレン管ワンタッチ式継手

Pワン継手 ※樹脂インコアを使用することで耐震強化型(S型)となります。



●仕様

| | |
|------|------------------------------|
| 使用圧力 | 0.75MPa以下 |
| 使用温度 | 常温 (20±15℃) |
| 使用流体 | 水道水 |
| 性能 | 平成9年厚生省令第14号の 耐圧及び浸出性能に適合 |

●部品表

| 部品番号 | 部品名称 | 材質 |
|------|--------|--------|
| 1 | 胴 | CAC902 |
| 2 | キャップ | CAC406 |
| 3 | ダストシール | POM |
| 4 | ストッパー | 耐脱亜鉛黄銅 |
| 5 | 止め輪 | POM |
| 6 | パッキン | EPDM |


●差し込み深さ

| 呼び径 | 差し込み深さ | 呼び径 | 差し込み深さ |
|-----|--------|-----|--------|
| 13 | 50mm | 30 | 75mm |
| 20 | 52mm | 40 | 90mm |
| 25 | 62mm | 50 | 103mm |

おねじ付ソケット



認証登録番号●特G-599




単位：mm

| 呼び径 | 本体価格 | S型価格 | L | D |
|-----|-------|-------|-----|-------|
| 13 | 1,590 | 1,770 | 68 | R 1/2 |
| 20 | 1,950 | 2,150 | 73 | R 3/4 |
| 25 | 2,750 | 2,970 | 86 | R1 |
| 30 | 4,560 | 4,950 | 101 | R11/4 |
| 40 | 6,390 | 6,840 | 117 | R21/2 |
| 50 | 8,470 | 8,970 | 134 | R2 |

めねじ付ソケット




認証登録番号●特G-599




単位：mm

| 呼び径 | 本体価格 | S型価格 | L | D |
|-----|-------|-------|-----|--------|
| 13 | 1,590 | 1,770 | 67 | Rc 1/2 |
| 20 | 1,950 | 2,150 | 71 | Rc 3/4 |
| 25 | 2,750 | 2,970 | 84 | Rc1 |
| 30 | 4,560 | 4,950 | 99 | Rc11/4 |
| 40 | 6,390 | 6,840 | 115 | Rc11/2 |
| 50 | 8,470 | 8,970 | 132 | Rc2 |

メータ用ソケット

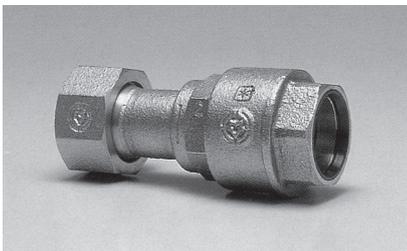

認証登録番号●特G-599




単位：mm

| 呼び径 | 本体価格 | S型価格 | L | D |
|--------|--------|--------|-------|--------|
| 13 | 2,760 | 2,940 | 82.5 | G 3/4 |
| 20 | 3,790 | 3,990 | 88 | G1 |
| 25 | 5,350 | 5,570 | 101 | G1 1/4 |
| 30 | 9,290 | 9,680 | 123.5 | G1 1/2 |
| 40 | 13,870 | 14,320 | 142.5 | G2 |
| 50 | 16,460 | 16,960 | 161 | G2 1/2 |
| 13×20P | 3,570 | 3,770 | 85 | G 3/4 |
| 13×25P | 4,870 | 5,090 | 95.5 | G 3/4 |
| 20×13P | 3,570 | 3,750 | 85.5 | G1 |
| 20×25P | 5,670 | 5,890 | 98.5 | G1 |
| 25×13P | 4,850 | 5,030 | 88 | G1 1/4 |
| 25×20P | 5,670 | 5,870 | 90.5 | G1 1/4 |
| 25×30P | 8,780 | 9,170 | 114 | G1 1/4 |

ソケット



認証登録番号●特G-599




単位：mm

| 呼び径 | 本体価格 | S型価格 | L | 呼び径 | 本体価格 | S型価格 | L |
|-------|--------|--------|-----|-------|--------|--------|-----|
| 13 | 2,420 | 2,780 | 102 | 30×20 | 5,250 | 5,840 | 130 |
| 20 | 3,010 | 3,410 | 106 | 30×25 | 5,570 | 6,180 | 141 |
| 25 | 4,040 | 4,480 | 128 | 40×20 | 7,300 | 7,950 | 146 |
| 30 | 6,890 | 7,670 | 153 | 40×25 | 7,780 | 8,450 | 156 |
| 40 | 10,120 | 11,020 | 185 | 40×30 | 9,240 | 10,080 | 169 |
| 50 | 12,920 | 13,920 | 210 | 50×20 | 8,950 | 9,650 | 158 |
| 20×13 | 2,930 | 3,310 | 104 | 50×25 | 9,450 | 10,170 | 169 |
| 25×13 | 3,660 | 4,060 | 115 | 50×30 | 11,140 | 12,030 | 182 |
| 25×20 | 3,870 | 4,290 | 117 | 50×40 | 11,950 | 12,900 | 197 |
| 30×13 | 4,770 | 5,340 | 128 | | | | |

チーズ



認証登録番号●G-599




単位：mm

| 呼び径 | 本体価格 | S型価格 | L | L1 | 呼び径 | 本体価格 | S型価格 | L | L1 |
|-------|--------|--------|-----|-----|-------|--------|--------|-----|-----|
| 13 | 3,880 | 4,420 | 122 | 61 | 30×25 | 9,930 | 10,930 | 187 | 84 |
| 20 | 5,480 | 6,080 | 132 | 66 | 40×13 | 12,240 | 13,320 | 204 | 75 |
| 25 | 6,880 | 7,540 | 160 | 80 | 40×20 | 12,290 | 13,390 | 210 | 77 |
| 30 | 10,980 | 12,150 | 194 | 97 | 40×25 | 13,210 | 14,330 | 217 | 88 |
| 40 | 16,850 | 18,200 | 230 | 115 | 40×30 | 17,210 | 18,500 | 225 | 101 |
| 50 | 22,020 | 23,520 | 268 | 134 | 50×13 | 16,810 | 17,990 | 228 | 81 |
| 20×13 | 4,670 | 5,250 | 126 | 64 | 50×20 | 18,130 | 19,330 | 234 | 83 |
| 25×13 | 5,520 | 6,140 | 148 | 67 | 50×25 | 18,430 | 19,650 | 241 | 94 |
| 25×20 | 6,480 | 7,120 | 154 | 69 | 50×30 | 21,460 | 22,850 | 249 | 107 |
| 30×13 | 9,110 | 10,070 | 174 | 71 | 50×40 | 22,480 | 23,930 | 256 | 122 |
| 30×20 | 9,620 | 10,600 | 180 | 73 | | | | | |

分・止水栓用



認証登録番号●G-599




単位：mm

| 呼び径 | 本体価格 | S型価格 | L | D |
|-----|--------|--------|-----|--------|
| 13 | 1,730 | 1,910 | 64 | G 3/4 |
| 20 | 2,360 | 2,560 | 68 | G1 |
| 25 | 3,090 | 3,310 | 81 | G1 1/4 |
| 30 | 4,850 | 5,240 | 95 | G1 1/2 |
| 40 | 7,170 | 7,620 | 114 | G2 |
| 50 | 10,120 | 10,620 | 129 | G2 1/2 |

エルボ



認証登録番号●G-599



単位：mm


| 呼び径 | 本体価格 | S型価格 | L |
|-----|--------|--------|-----|
| 13 | 2,960 | 3,320 | 63 |
| 20 | 3,790 | 4,190 | 68 |
| 25 | 5,150 | 5,590 | 82 |
| 30 | 7,910 | 8,690 | 99 |
| 40 | 11,470 | 12,370 | 117 |
| 50 | 15,530 | 16,530 | 137 |

PE-HI用ソケット

(ポリエチレン管×塩ビ管)



認証登録番号●G-599

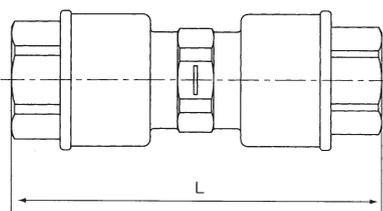


単位：mm


| 呼び径 | 本体価格 | S型価格 | L |
|--------|--------|--------|-------|
| 13 | 3,680 | 3,860 | 103 |
| 20 | 4,010 | 4,210 | 108.5 |
| 25 | 6,170 | 6,390 | 128 |
| 30 | 9,860 | 10,250 | 153 |
| 40 | 12,600 | 13,050 | 185 |
| 50 | 16,430 | 16,930 | 210 |
| 20×13V | 4,140 | 4,340 | 105 |
| 25×13V | 4,870 | 5,090 | 116 |
| 25×20V | 5,060 | 5,280 | 119 |

PE-HI用エルボ

(ポリエチレン管×塩ビ管)

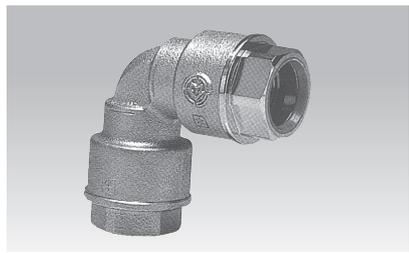

認証登録番号●G-599



単位：mm

| 呼び径 | 本体価格 | S型価格 | L1 | L2 |
|--------|--------|--------|-----|------|
| 13 | 4,440 | 4,620 | 63 | 64 |
| 20 | 5,410 | 5,610 | 68 | 70.5 |
| 25 | 7,480 | 7,700 | 82 | 82 |
| 30 | 10,180 | 10,570 | 99 | 99 |
| 40 | 13,050 | 13,500 | 117 | 117 |
| 50 | 17,150 | 17,650 | 137 | 137 |
| 20×13V | 4,580 | 4,780 | 66 | 67.5 |