


# 水道用ポリエチレン管ワンタッチ式継手

## Pワン継手 ※樹脂インコアを使用することで耐震強化型(S型)となります。



### ●仕様

使用圧力	0.75MPa以下
使用温度	常温 (20±15℃)
使用流体	水道水
性能	平成9年厚生省令第14号の耐圧及び浸出性能に適合

### ●部品表

部品番号	部品名称	材質
1	胴	CAC902
2	キャップ	CAC406
3	ダストシール	POM
4	ストッパー	耐脱亜鉛黄銅
5	止め輪	POM
6	パッキン	EPDM


### ●差し込み深さ

呼び径	差し込み深さ	呼び径	差し込み深さ
13	50mm	30	75mm
20	52mm	40	90mm
25	62mm	50	103mm

## おねじ付ソケット



認証登録番号●特G-599




単位: mm

呼び径	本体価格	S型価格	L	D
13	2,100	2,340	68	R 1/2
20	2,590	2,850	73	R 3/4
25	3,650	3,950	86	R1
30	6,040	6,560	101	R11/4
40	8,450	9,050	117	R21/2
50	11,210	11,880	134	R2

## めねじ付ソケット




認証登録番号●特G-599




単位: mm

呼び径	本体価格	S型価格	L	D
13	2,100	2,340	67	Rc 1/2
20	2,590	2,850	71	Rc 3/4
25	3,650	3,950	84	Rc1
30	6,040	6,560	99	Rc11/4
40	8,450	9,050	115	Rc11/2
50	11,210	11,880	132	Rc2

## メータ用ソケット

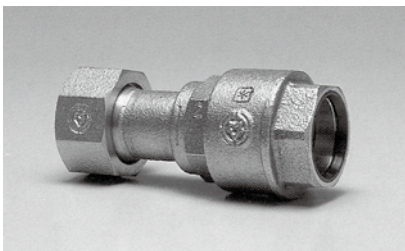

認証登録番号●特G-599




単位: mm

呼び径	本体価格	S型価格	L	D
13	3,660	3,900	82.5	G 3/4
20	5,010	5,270	88	G1
25	7,080	7,380	101	G1 1/4
30	12,290	12,810	123.5	G1 1/2
40	18,350	18,950	142.5	G2
50	21,770	22,440	161	G2 1/2
13×20P	4,730	4,990	85	G 3/4
13×25P	6,450	6,750	95.5	G 3/4
20×13P	4,730	4,970	85.5	G1
20×25P	7,510	7,810	98.5	G1
25×13P	6,420	6,660	88	G1 1/4
25×20P	7,510	7,770	90.5	G1 1/4
25×30P	11,620	12,140	114	G1 1/4

## ソケット




認証登録番号●特G-599




単位: mm

呼び径	本体価格	S型価格	L	呼び径	本体価格	S型価格	L
13	3,210	3,690	102	30×20	6,950	7,730	130
20	3,990	4,510	106	30×25	7,370	8,190	141
25	5,350	5,950	128	40×20	9,660	10,520	146
30	9,120	10,160	153	40×25	10,290	11,190	156
40	13,390	14,590	185	40×30	12,220	13,340	169
50	17,090	18,430	210	50×20	11,850	12,780	158
20×13	3,880	4,380	104	50×25	12,500	13,470	169
25×13	4,840	5,380	115	50×30	14,740	15,930	182
25×20	5,130	5,690	117	50×40	15,810	17,080	197
30×13	6,310	7,070	128				

## チーズ

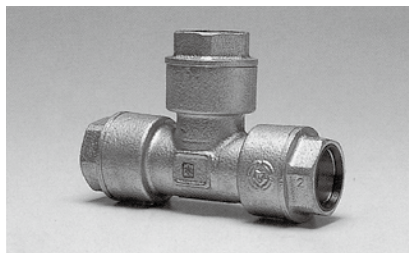

認証登録番号●G-599




単位：mm

呼び径	本体価格	S型価格	L	L1	呼び径	本体価格	S型価格	L	L1
13	5,140	5,860	122	61	30×25	13,130	14,470	187	84
20	7,260	8,040	132	66	40×13	16,190	17,630	204	75
25	9,110	10,010	160	80	40×20	16,260	17,720	210	77
30	14,520	16,080	194	97	40×25	17,480	18,980	217	88
40	22,290	24,090	230	115	40×30	22,770	24,490	225	101
50	29,130	31,140	268	134	50×13	22,240	23,820	228	81
20×13	6,190	6,950	126	64	50×20	23,980	25,580	234	83
25×13	7,300	8,140	148	67	50×25	24,380	26,020	241	94
25×20	8,580	9,440	154	69	50×30	28,380	30,240	249	107
30×13	12,050	13,330	174	71	50×40	29,740	31,680	256	122
30×20	12,730	14,030	180	73					

## 分・止水栓用



認証登録番号●G-599




単位：mm

呼び径	本体価格	S型価格	L	D
13	2,290	2,530	64	G 3/4
20	3,130	3,390	68	G1
25	4,090	4,390	81	G1 1/4
30	6,420	6,940	95	G1 1/2
40	9,490	10,090	114	G2
50	13,390	14,060	129	G2 1/2

## エルボ



認証登録番号●G-599




単位：mm


呼び径	本体価格	S型価格	L
13	3,920	4,400	63
20	5,010	5,530	68
25	6,820	7,420	82
30	10,470	11,510	99
40	15,180	16,380	117
50	20,540	21,880	137

## PE-HI用ソケット

(ポリエチレン管×塩ビ管)

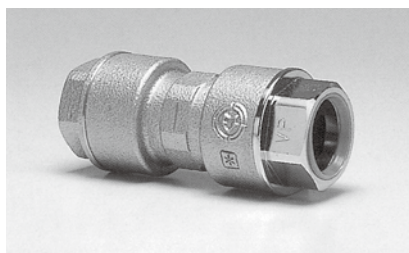

認証登録番号●G-599

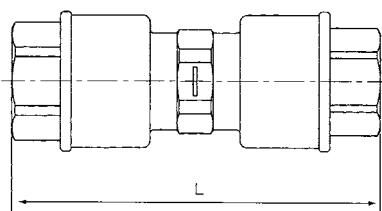

単位：mm


呼び径	本体価格	S型価格	L
13	4,880	5,120	103
20	5,310	5,570	108.5
25	8,170	8,470	128
30	13,040	13,560	153
40	16,660	17,260	185
50	21,740	22,410	210
20×13V	5,490	5,750	105
25×13V	6,450	6,750	116
25×20V	6,690	6,990	119

## PE-HI用エルボ

(ポリエチレン管×塩ビ管)



認証登録番号●G-599



単位：mm

呼び径	本体価格	S型価格	L1	L2
13	5,880	6,120	63	64
20	7,160	7,420	68	70.5
25	9,900	10,200	82	82
30	13,470	13,990	99	99
40	17,260	17,860	117	117
50	22,690	23,360	137	137
20×13V	6,060	6,320	66	67.5