



溶接フランジ

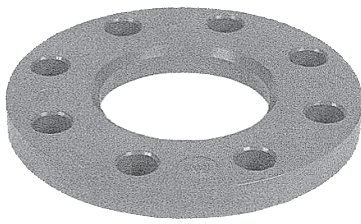


㊱

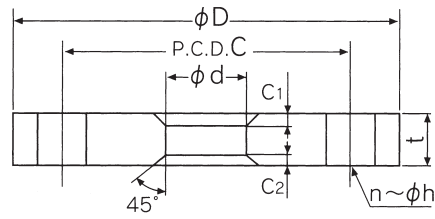


板フランジ



㊰



㊱

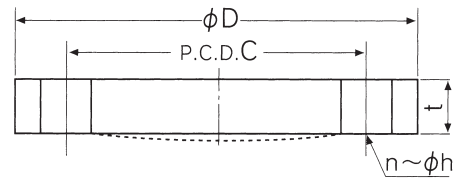

▼ U-PVC JIS 10K・5K

単位：mm

呼び径	d	C		D		n(ヶ)		h		t		C1	C2
		10K	5K	10K	5K	10K	5K	10K	5K	10K	5K		
13	18	65	55	90	75	4	4	15	12	12	9	3	3
15	22	70	60	95	80	4	4	15	12	12	9	3	3
20	26	75	65	100	85	4	4	15	12	14	10	3	3
25	32	90	75	125	95	4	4	19	12	14	10	3	3
32	38	100	90	135	115	4	4	19	15	16	12	3	3
40	48	105	95	140	120	4	4	19	15	16	12	3	3
50	60	120	105	155	130	4	4	19	15	16	14	3	4
65	76	140	130	175	155	4	4	19	15	18	14	3	4
80	89	150	145	185	180	8	4	19	19	18	14	3	4
100	114	175	165	210	200	8	8	19	19	18	16	3	4
125	140	210	200	250	235	8	8	23	19	20	16	4	4
150	165	240	230	280	265	8	8	23	19	22	18	4	4
200	216	290	280	330	320	12	8	23	23	22	20	4	4
250	267	355	345	400	385	12	12	25	23	24	22	4	4
300	318	400	390	445	430	16	12	25	23	24	22	4	4

(注) 符号D2、D3、n、e寸法はJIS 10・5K規格に準じています。

溶接フランジ及び板フランジ

呼び径	形式	㊱フランジ		㊰フランジ		㊱フランジ		
	形状							
	材質規格	U-PVC		U-PVC		U-PVC		HI-PVC
	JIS 10K	JIS 5K	JIS 10K	JIS 5K	JIS 10K	JIS 5K	JIS 10K	JIS 10K
13mm	480	310	590	480	820	710	950	
15	520	430	610	520	870	730	1,150	
20	590	460	800	530	1,020	760	1,360	
25	850	480	1,130	570	1,380	800	1,690	
32	1,040	610	1,410	850	1,670	1,130	2,160	
40	1,090	660	1,520	960	1,790	1,210	2,740	
50	1,380	870	1,800	1,130	2,090	1,410	2,820	
65	1,670	1,250	2,400	1,740	2,750	1,970	3,320	
80(75)	1,820	1,500	2,780	2,290	3,080	2,520	4,010	
100	2,750	2,580	3,560	3,330	3,870	3,620	5,200	
125	3,560	3,540	5,170	4,480	5,490	4,810	7,960	
150	4,810	4,480	6,880	5,900	7,390	6,210	11,380	
200	6,210	5,830	10,360	9,350	10,590	9,650	12,520	
250	8,110	7,740	15,490	13,300	16,000	13,880	19,510	
300	10,940	10,210	21,840	19,050	22,730	19,930	26,640	

(注) ㊱ フランジ：パイプ溶接用フランジ

㊰ フランジ：板フランジ(パイプ孔無し・ボルト孔無し)

㊱ フランジ：板フランジ(パイプ孔無し・ボルト孔明)