
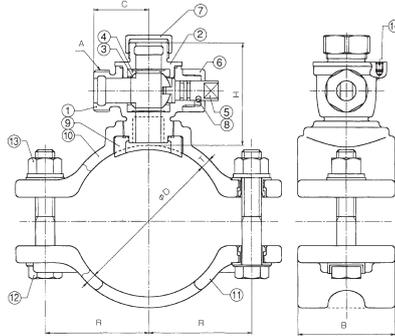



# サドル付分水栓 (JWWA B 117)

鑄鉄管用 AS-DIP



### ●部品表

部番	部品名称	材質
1	胴	CAC902
2	ボール押さえ	CAC902
3	ボール	CAC902C
4	ボールシート	PTFE
5	栓棒	CAC902
6	保護ナット	CAC902
7	キャップ	CAC406
8	止めピン	SUS304
9	サドル取付ガasket	NBR
10	サドル	FCD450
11	バンド	FCD450
12	ボルト	SUS304
13	ナット	SUS304
14	止めピン	C3604

硬質塩ビ管用・鋼管用 AS-VS・AS-SP



### 小口径

#### ●止水機構寸法表 単位: mm

呼び径	A	H	C
13	G 3/4	75	37
20	G1	87.5	45
25	G1 1/4	100	51.5

### 大口徑

#### ●止水機構寸法表 単位: mm

呼び径	A	H	C
30	G1 1/2	118.5	67
40	G2	133.5	70
50	G2 1/2	149.5	73.5

#### ●サドルバンド寸法表 13~25 単位: mm



管種	管径	φD	T	B	R
DIP	75	98	8.5	80	-
	100	125	9	80	80
	150	179	9	80	107.5
	200	233	11	100	135
	250	287	12	100	162.5
	300	341	12.5	100	190
350	394	13	100	215	
VP	40	49	7	80	-
	50	62	7	80	-
SP	75	91	7	80	-
	100	116	9	80	85
SP	150	167	9	80	110
	125	142	9	80	97
SP	200	218	9	100	138.5

#### ●サドルバンド寸法表 30~50 単位: mm

管種	管径	φD	T	B	R
DIP	75	98	8.5	120	73
	100	125	9	120	80
	150	179	9	120	107.5
	200	233	11	160	135
	250	287	12	160	162.5
	300	341	12.5	160	190
350	394	13	160	215	
VP	75	91	7	120	74
	100	116	9	120	89
SP	150	167	9	120	110
	125	142	9	120	97
SP	200	218	9	160	138.5

鑄鉄管・石綿セメント管兼用 AS-CA

石綿セメント管 AS-A



#### ●止水機構寸法表 単位: mm

呼び径	d	H	C
13	G 3/4	75	37
20	G1	87.5	45
25	G1 1/4	100	51.5

#### ●止水機構寸法表 単位: mm

呼び径	d	H	C
30	G1 1/2	118.5	67
40	G2	133.5	70
50	G2 1/2	149.5	73.5



#### ●サドルバンド寸法表 単位: mm

管種	管径	D	T1	T2	B1	B2
APC	50	75	7	7	80	-
CIP	75	101	8	8	70	130
	100	130	8	9	70	166
	150	190	8	9	70	218
	200	224	10	11	90	256
CIP	250	276	11	12	90	308
	300	326	11	12.5	90	360
	350	378	12	13	90	410

#### ●サドルバンド寸法表 単位: mm

管種	管径	D	T1	T2	B1	B2
ACP	75	101	8.5	8.5	120	73
CIP	100	130	9	9	120	178
	125	160	9	9	120	210
	150	190	9	9	120	230
	200	251	10	10	140	291
ACP	250	312	11	11	140	352
	300	370	12	12	160	410
	350	435	13	13	160	480

鑄鉄管 AS-C



#### ●止水機構寸法表 単位: mm


呼び径	A	C	H
13	G 3/4	37	78
20	G1	45	87.5
25	G1 1/4	51.5	100
30	G1 1/2	67	118.5
40	G2	70	133.5
50	G2 1/2	73.5	149.5

#### ●サドルバンド寸法表 単位: mm

管種	管径	φD	B
CIP	400	430	170
	450	480	170
	500	532	170

備考 呼び径400~500のサドルバンドは三つ割となり、ボルト・ナットを4本使用します。




ポリエチレン管用 PP2型AS (JWWA B 136)

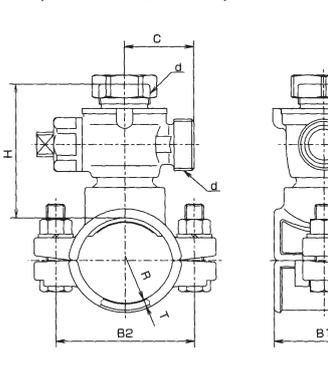

#### ●寸法表

管種	呼び径	d	H	C	R	T	B1	B2
40	13	G 3/4	78	37	R24	4	60	80
	20	G1	90.5	45	R24	4	60	80
50	13	G 3/4	75	37	R31	4.5	65	90
	20	G1	87.5	45	R31	4.5	65	90
	25	G1 1/4	90	51.5	R31	4.5	65	90

品名	呼び径	価格	
サドル付分水栓 AS-A ボール式 石綿管用	50×13	13,760	
	20	16,430	
	25	18,810	
サドル付分水栓 AS-CA ボール式 鋳鉄・石綿管用	75×13	14,470	
	20	17,140	
	25	19,510	
	100×13	15,160	
	20	17,880	
	25	20,260	
	125×13	16,360	
	20	17,970	
	25	20,850	
	150×13	17,280	
	20	19,960	
	25	22,330	
サドル付分水栓 AS-DIP ボール式 鋳鉄管用	200×13	26,300	
	20	29,100	
	25	31,760	
サドル付分水栓 AS-A ボール式 石綿管用	250×13	29,590	
	20	32,400	
	25	34,990	
	300×13	32,930	
	20	35,740	
	25	38,390	
	350×13	35,050	
	20	38,120	
	25	40,460	
	サドル付分水栓 AS-DIP ボール式 鋳鉄管用	75×30	36,410
40		43,560	
50		55,420	
サドル付分水栓 AS-CA ボール式 鋳鉄・石綿管用		100×30	38,430
		40	45,530
サドル付分水栓 AS-A ボール式 石綿管用		50	56,520
		125×30	41,310
		40	47,950
		50	58,430
		150×30	44,320
		40	51,220
		50	61,960
		200×30	51,280
		40	58,140
		50	67,820
	250×30	61,010	
	40	67,870	
	50	77,300	
300×30	70,940		
40	77,900		
50	87,330		
350×30	77,690		
40	84,600		
50	94,030		
サドル付分水栓 PP2型AS ボール式 ポリエチレン管用	40×13	10,650	
	20	13,030	
	50×13	10,990	
	20	13,530	
	25	17,150	



品名	呼び径	価格
サドル付分水栓 AS-VS ボール式 ビニール・鋼管用	40×13	13,030
	20	15,210
	25	18,810
サドル付分水栓 AS-SP ボール式 鋼管用	50×13	13,080
	20	15,440
	25	17,860
	30	36,910
	75×13	13,760
	20	16,120
	25	18,550
	30	36,910
	40	43,110
	50	54,410
	100×13	15,170
	20	17,300
	25	19,840
	30	38,620
	40	45,590
50	56,270	
サドル付分水栓 AS-C ボール式 鋳鉄管用	125×13	16,190
	20	18,360
	25	21,190
	30	45,280
	40	53,300
	50	64,520
	150×13	16,630
	20	18,780
	25	21,110
	30	45,820
	40	53,800
	50	65,800
	200×13	21,130
	20	24,350
	25	27,350
30	56,930	
40	65,500	
50	77,500	
サドル付分水栓 AS-C ボール式 鋳鉄管用	400×13	87,600
	20	90,630
	25	93,550
	30	101,110
	40	108,510
	50	118,820
	450×13	100,620
	20	101,110
	25	104,000
	30	112,420
	40	119,690
	50	129,990
	500×13	106,600
	20	106,970
	25	109,800
30	117,080	
40	124,480	
50	134,740	

