



溶接フランジ

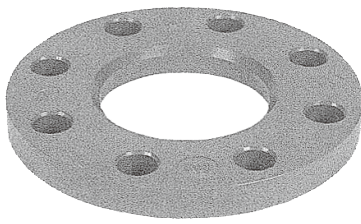


㊱

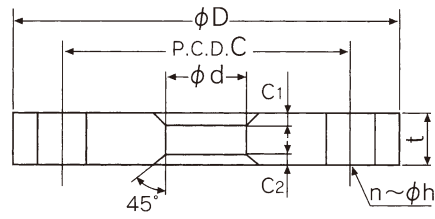


板フランジ



㊰



㊱

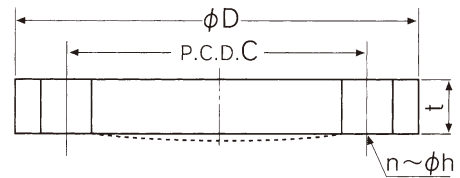

▼ U-PVC JIS 10K・5K

単位：mm

呼び径	d	C		D		n(ヶ)		h		t		C1	C2
		10K	5K	10K	5K	10K	5K	10K	5K	10K	5K		
13	18	65	55	90	75	4	4	15	12	12	9	3	3
15	22	70	60	95	80	4	4	15	12	12	9	3	3
20	26	75	65	100	85	4	4	15	12	14	10	3	3
25	32	90	75	125	95	4	4	19	12	14	10	3	3
32	38	100	90	135	115	4	4	19	15	16	12	3	3
40	48	105	95	140	120	4	4	19	15	16	12	3	3
50	60	120	105	155	130	4	4	19	15	16	14	3	4
65	76	140	130	175	155	4	4	19	15	18	14	3	4
80	89	150	145	185	180	8	4	19	19	18	14	3	4
100	114	175	165	210	200	8	8	19	19	18	16	3	4
125	140	210	200	250	235	8	8	23	19	20	16	4	4
150	165	240	230	280	265	8	8	23	19	22	18	4	4
200	216	290	280	330	320	12	8	23	23	22	20	4	4
250	267	355	345	400	385	12	12	25	23	24	22	4	4
300	318	400	390	445	430	16	12	25	23	24	22	4	4

(注) 符号D2、D3、n、e寸法はJIS 10・5K規格に準じています。

溶接フランジ及び板フランジ

呼び径	形式	㊱フランジ		㊰フランジ		㊱フランジ		
	形状							
	材質規格	U-PVC		U-PVC		U-PVC		HI-PVC
		JIS 10K	JIS 5K	JIS 10K	JIS 5K	JIS 10K	JIS 5K	JIS 10K
13mm		530	340	650	530	900	780	1,050
15		570	470	670	570	960	800	1,270
20		650	510	880	580	1,120	840	1,500
25		940	530	1,240	630	1,520	880	1,860
32		1,140	670	1,550	940	1,840	1,240	2,380
40		1,200	730	1,670	1,060	1,970	1,330	3,010
50		1,520	960	1,980	1,240	2,300	1,550	3,100
65		1,840	1,380	2,640	1,910	3,030	2,170	3,650
80(75)		2,000	1,650	3,060	2,520	3,390	2,770	4,410
100		3,030	2,840	3,920	3,660	4,260	3,980	5,720
125		3,920	3,890	5,690	4,930	6,040	5,290	8,760
150		5,290	4,930	7,570	6,490	8,130	6,830	12,520
200		6,830	6,410	11,400	10,290	11,650	10,620	13,770
250		8,920	8,510	17,040	14,630	17,600	15,270	21,460
300		12,030	11,230	24,020	20,960	25,000	21,920	29,300

(注) ㊱ フランジ：パイプ溶接用フランジ
 ㊰ フランジ：板フランジ(パイプ孔無し・ボルト孔無し)
 ㊱ フランジ：板フランジ(パイプ孔無し・ボルト孔明)